



DATE: \_\_\_\_\_

LOCATION: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CATALOG #: \_\_\_\_\_

# NC-WPEF-60W-CWP-3CCT-PC LED WALL PACK LIGHT FIXTURE

## DESCRIPTION

General Purpose LED Wall Pack Light | Power Select 60/50/40/30W |  
CCT Select 3000/4000/5000K | AC120-277V Input | Bronze Housing

## APPLICATION

Wall mounted outdoor illumination needs, such as factories,  
warehouses, commercial buildings, self storage, entrances, exit ways and walkways



## PRODUCT FEATURES

- NCLTG Power Select technology (60/50/40/30W)
  - NCLTG CCT Select technology (3000/4000/5000K)
  - Die cast-aluminum housing, good dissipation
  - Full cut-off design dark sky complaint.
  - Removable hinged door for easy installation.
- Powered by LED 0–10V dimming driver
  - Ambient operating temperature: –30°C/–22°F to 45°C/113°F
  - UL certified for wet locations, IP65 rated
  - Power Factor: > 0.9
  - THD: < 20%
  - L70 @ >50,000 hrs @ 25°C/77°F ambient fixture temperature

## PERFORMANCE SPECIFICATIONS

DLC Product ID	Catalog Number	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Current	Input Voltage	Dimming	CRI	Distribution Pattern	Nominal Size
	NC-WPEF-60W-CWP-3CCT	60W	3000K	8937	148 lm/W	0.55A	120–277V	0–10V	>80	T3	13"
			4000K	9641	166 lm/W						
			5000K	9471	157 lm/W						
		50W	3000K	7549	154 lm/W						
			4000K	8075	169 lm/W						
			5000K	8008	162 lm/W						
		40W	3000K	6218	158 lm/W						
			4000K	6597	172 lm/W						
			5000K	6598	167 lm/W						
		30W	3000K	4801	161 lm/W						
			4000K	5090	174 lm/W						
			5000K	5350	174 lm/W						


Note: Preset to highest wattage (60W/5000K)  
Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017



DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
CATALOG #: \_\_\_\_\_

NC-WPEF-60W-CWP-3CCT-PC  
LED WALL PACK LIGHT FIXTURE


PHOTOMETRIC SPECIFICATIONS  
POLAR CANDELA DISTRIBUTION

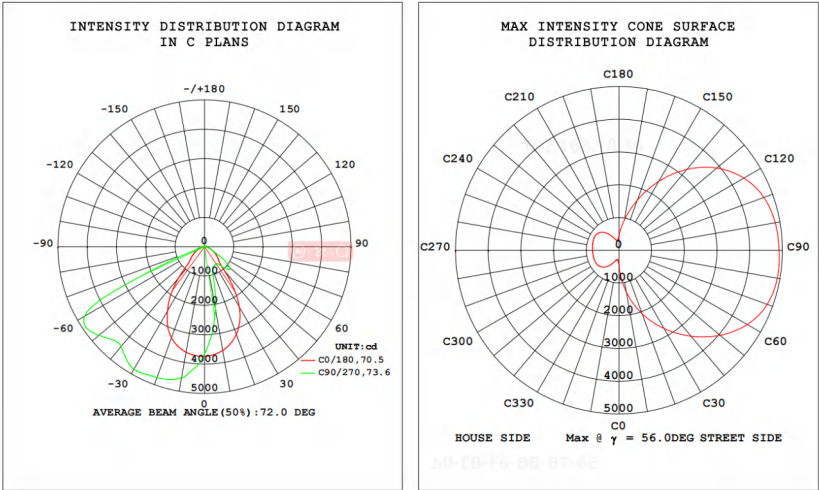


POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT

This fixture is equipped with field-adjustable NCLTG Power Select and CCT Select technology.


1. Ensure power is off to the fixture.
2. Remove two screws, remove the rear cover of the luminaire and pull the connector.
3. Adjust dip switches to desired settings.
4. Screw in the cover of the luminaire.
5. Restore power to fixture.

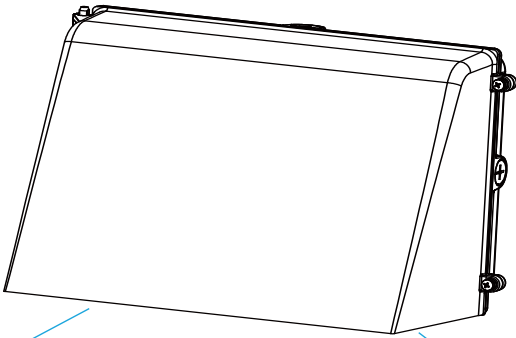

**POWER SELECT ADJUSTMENT SWITCH**  
Set dip switch to adjust wattage between 30, 40W, 50W, and 60 W. Fixture comes preset at 60W.



**CCT SELECT ADJUSTMENT SWITCH**  
Set dip switch to adjust CCT between 3000K, 4000K, and 5000K. Fixture comes preset at 5000K.





DATE: \_\_\_\_\_

LOCATION: \_\_\_\_\_


TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_


CATALOG #: \_\_\_\_\_

NC-WPEF-60W-CWP-3CCT-PC  
LED WALL PACK LIGHT FIXTURE

DIMENSIONS

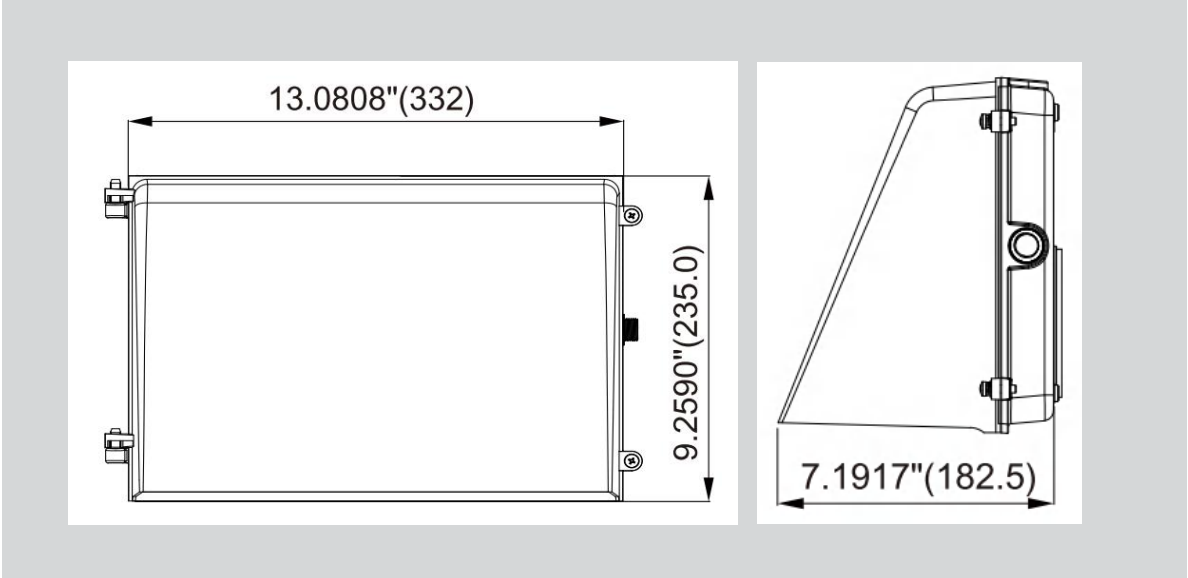

WIRING DIAGRAMS

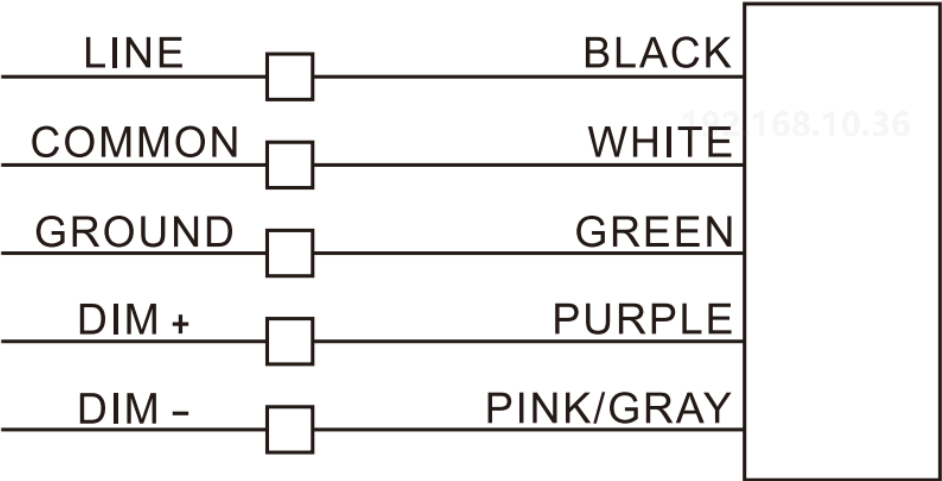

PACKING INFO

Catalog Number	Prouduct Dimension (mm & inch)	Carton Size (mm & inch)	Net Weight (KG)	Gross Weight (KG)	20GP (PCS)	40GP (PCS)	40HQ (PCS)
NC-WPEF-60W-CWP-3CCT-PC	360.4*189*235.5mm (14.2"*7.44"*9.3")	372*278*230mm (14.6"*10.9"*9.1")	2.5	3.3	1096	2270	2660