

DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

NC-WPE-60W-CWP-3CCT LED WALL PACK LIGHT FIXTURE

DESCRIPTION

General Purpose LED Wall Pack Light | Power Select 60/50/40/30W | CCT Select 3000/4000/5000K | AC120-277V Input | Bronze Housing

APPLICATION

Wall mounted outdoor illumination needs, such as factories, warehouses, commercial buildings, self storage, entrances, exit ways and walkways













PRODUCT FEATURES

- NCLTG Power Select technology (60/50/40/30W)
- NCLTG CCT Select technology (3000/4000/5000K)
- Die cast-aluminum housing, good dissipation
- Semi cut-off design for different applications.
- Glass lenses for high light transmitiance.

- Powered by LED 0-10V dimming driver
- Ambient operating temperature: -30°C/-22°F to 45°C/113°F
- UL certified for wet locations, IP65 rated
- Power Factor: > 0.9
- THD: < 20%
- L70 @ >50,000 hrs @ 25°C/77°F ambient fixture temperature

PERFORMANCE SPECIFICATIONS

DLC Product ID	Catalog Number	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Current	Input Voltage	Dimming	CRI	Distribution Pattern	Nominal Size
	NC-WPE-60W-CWP-3CCT	60W	3000K	8340	139 lm/W	0.55A	120-277V	0-10V	>80	120°	14"
			4000K	9180	153 lm/W						
			5000K	9471	148 lm/W						
		50W	3000K	8880	142 lm/W						
			4000K	7800	156 lm/W						
			5000K	7600	152 lm/W						
		40W	3000K	5840	146 lm/W						
			4000K	6320	158 lm/W						
		5000K	6240	156 lm/W							
		30W	3000K	4440	148 lm/W						
			4000K	4770	159 lm/W						
			5000K	4740	158 lm/W						

Note: Preset to highest wattage (60W/5000K)
Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017





DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

NC-WPE-60W-CWP-3CCT LED WALL PACK LIGHT FIXTURE

PHOTOMETRIC SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

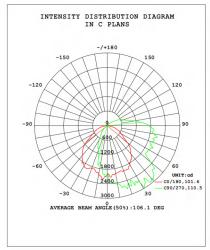




POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT


This fixture is equipped with field-adjustable NCLTG Power Select and CCT Select technology.


- 1. Ensure power is off to the fixture.
- 2. Remove two screws, remove the rear cover of

the luminaire and pull the connector.

- 3. Adjust dip switches to desired settings.
- 4. Screw in the cover of the luminaire.
- 5. Restore power to fixture.



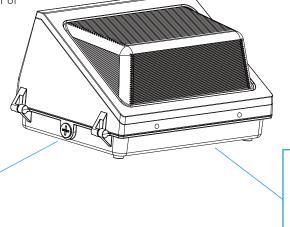







DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

NC-WPE-60W-CWP-3CCT LED WALL PACK LIGHT FIXTURE

DIMENSIONS

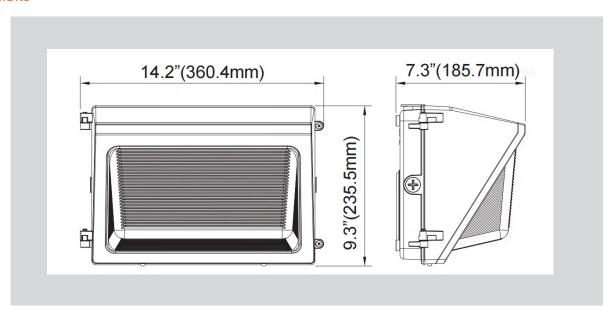

WIRING DIAGRAMS

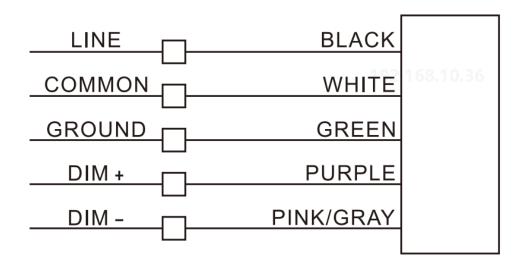

PACKING INFO

Item	QTY	Carton-CM	N.W(KG)	G.W(KG)	20GP	40GP	40HQ
NC-WPE-60W-CWP-3CCT	1PCS	380*280*240mm 14.96" X 11.02" X9.45"	3.8	4.5	1094PCS	2109PCS	2656PCS