



DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

LineVolt Series LED Linear Strip Light

DESCRIPTION

LED Linear Strip Light | 4FT Power Select 25/30/35/40/50W |
 8FT Power Select 50/60/70/80/100W | CCT Select 3500/4000/5000/5700/6500K | 120-277V

APPLICATION

Suitable for Warehouse, Manufacturing Facilities, Storage, Retail, Aisles etc.



PRODUCT FEATURES

- Tunable 5-Wattages.
 NCLTG 4FT Power Select technology(25/30/35/40/50W)
 NCLTG 8FT Power Select technology(50/60/70/80/100W)
- Tunable 5-CCT (3500K, 4000K, 5000K, 5700K, 6500K).
- Metal Housin | White Frosted Cover | Plastic End Caps
- Linkable: 4FT up to 10 pieces. 8FT up to 5 pieces.
- Powered by LED 0-10V dimming driver.
- Ambient operating temperatures -4°F to 113°F (-20°C to 45°C).
- DLC Premium listed. ETL certified to meet US and Canadian standards.
- Power Factor: > 0.9
- THD: < 20%
- 5 years exclusive limited warranty.

ORDERING INFORMATION

Order Code	DLC Product ID	Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	CRI	Power Factor
010604	-	NC-SP4F-M50W-CCT	4FT	(25W, 30W, 35W, 40W, 50W)	120-277V	0.21A@120V, 0.10A@277V 0.25A@120V, 0.12A@277V 0.29A@120V, 0.13A@277V 0.33A@120V, 0.15A@277V 0.42A@120V, 0.19A@277V	3750 4350 4900 5400 6500	130-150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9
010614	-	NC-SP4F-M50W-CCT-S	4FT	(25W, 30W, 35W, 40W, 50W)	120-277V	0.21A@120V, 0.10A@277V 0.25A@120V, 0.12A@277V 0.29A@120V, 0.13A@277V 0.33A@120V, 0.15A@277V 0.42A@120V, 0.19A@277V	3750 4350 4900 5400 6500	130-150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9
010608	-	NC-SP8F-M100W-CCT	8FT	(50W, 60W, 70W, 80W, 100W)	120-277V	0.42A@120V, 0.20A@277V 0.51A@120V, 0.24A@277V 0.57A@120V, 0.26A@277V 0.66A@120V, 0.30A@277V 0.83A@120V, 0.37A@277V	6500 7800 9100 10400 13000	130-150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9
010618	-	NC-SP8F-M100W-CCT-S	8FT	(50W, 60W, 70W, 80W, 100W)	120-277V	0.42A@120V, 0.20A@277V 0.51A@120V, 0.24A@277V 0.57A@120V, 0.26A@277V 0.66A@120V, 0.30A@277V 0.83A@120V, 0.37A@277V	6500 7800 9100 10400 13000	130-150 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9



LineVolt Series LED Linear Strip Light

Multiple Sensor Solutions Ready

Quick and Easy in-field installation of sensors.(The sensor receptacle is pre-embedded in the profile frame.)



ACCESSORIES(SOLD SEPARATELY)



Emergency LED Driver



Sensor

EMERGENCY


- EM9 Emergency LED Driver, 9W, 90-Min Battery
- EM15 Emergency LED Driver, 15W, 90-Min Battery

Sensor

Model Number	Sensor Type	Connector	Controller
HD08VR-M-1	Microwave	Audio Jack	Remote Control HD06R
HD08VR-MB-1 	Microwave		HAISEN BLUE APP
HD08VR-PB-1	PIR		Remote Control HD06R
HD08VR-PB-1 	PIR		HAISEN BLUE APP

DIMENSIONS

Unit: mm/inch

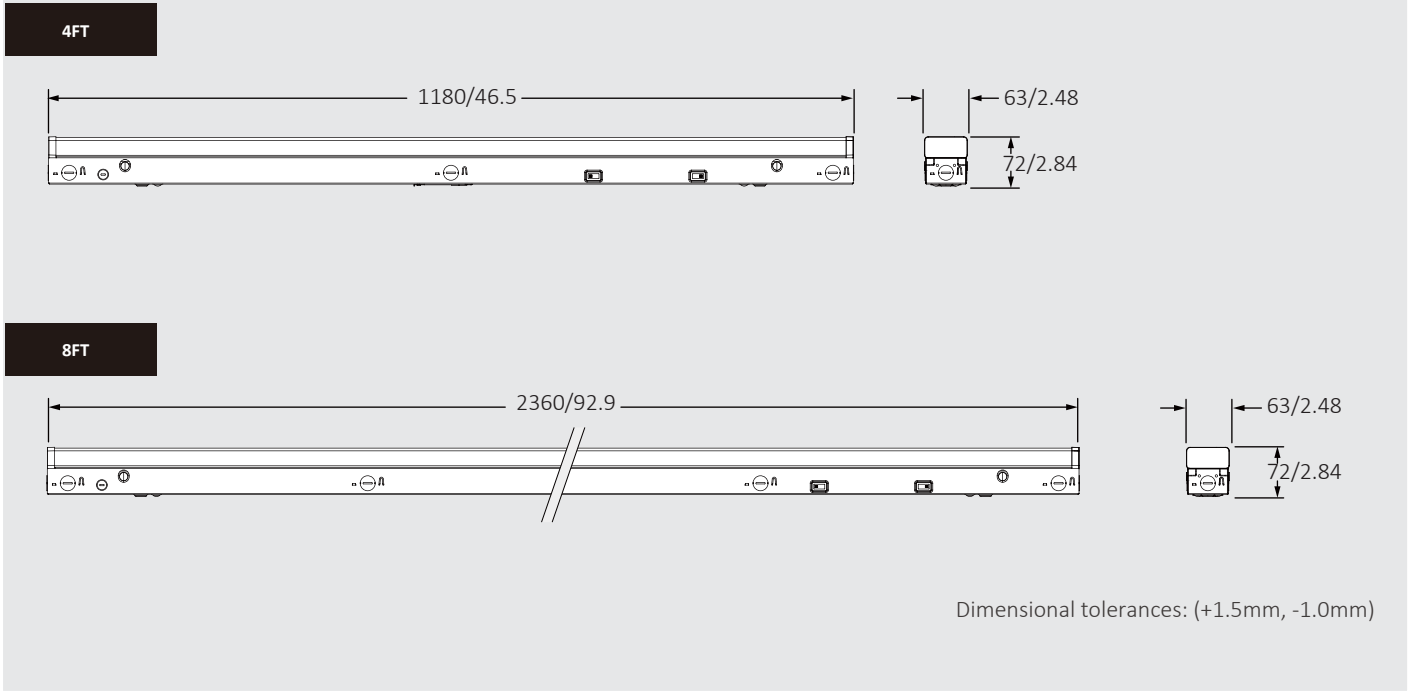





LineVolt Series LED Linear Strip Light

PHOTOMETRIC DATA


4FT

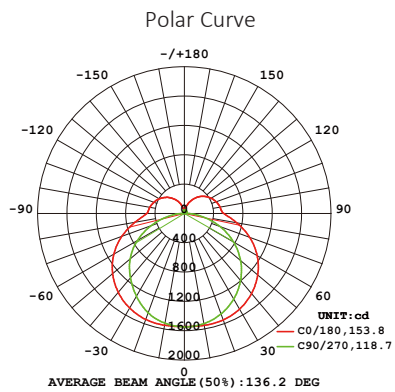


Cone Chart

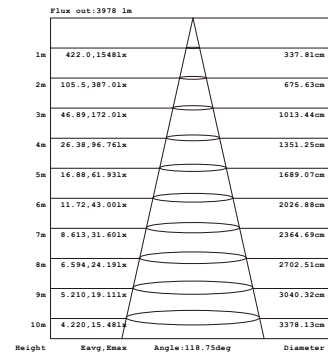

8FT

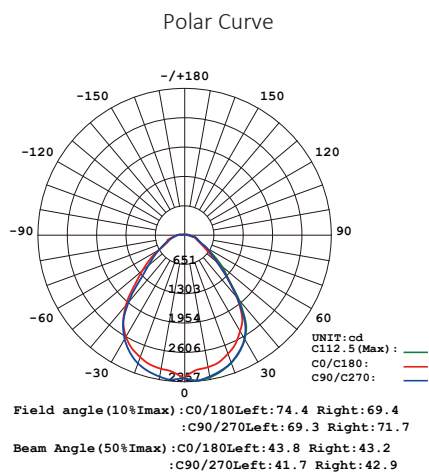

Cone Chart

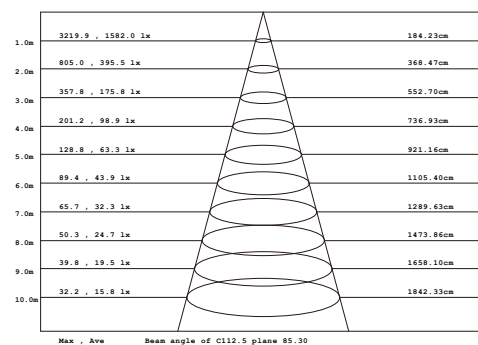

PACKING INFO

Catalog Number	Product Weight (kg)		Package Weight (kg)		Q'ty/BOX (PCS)	Q'ty/CTN (PCS)	Carton Size(mm)	40HQ (PCS)
	N.W/CTN	G.W/CTN	N.W/CTN	G.W/CTN				
NC-SP4F-M50W-CCT	1.41	1.8	8.46	11.71	1	6	1245*260*160mm (48.02"*10.24"*6.3")	7290
NC-SP8F-M100W-CCT	2.82	3.52	11.28	16.28	1	4	2425*180*160mm (95.47"*7.09"*6.3")	3120