



DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

StormGuard Series LED Vapor Tight Light

DESCRIPTION

5-Wattages + 5-CCT (35/40/50/57/65K), Damp Rated, 130lm/W, Dimmable+Smart



PRODUCT FEATURES

- LED Vapor Tight is manufactured of impact resistant plastic resins that are designed to keep moisture, dirt and dust out. To protect interior wires and components inside the fixture.
- Built with the highest quality driver that is Universal Voltage (120V-277Vac).
- Uses long lasting, highly-efficient LED packages.
- IP65
- 0-10V Continuous Dimming.
- Tunable 5-CCT (3500K, 4000K, 5000K, 5700K, 6500K).
- Tunable 5-Wattages.
- Operating temperatures -4°F to 113°F (-20°C to 45°C).
- DLC Premium listed. ETL certified to meet US and Canadian standards.
- 5 years exclusive limited warranty.

ORDERING INFORMATION

Order Code	DLC Product ID	Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	CRI	Power Factor
010502	S-B7ZP81	NC-VP2F-M25W-CCT	2FT	(12W, 15W, 18W, 22W, 25W)	120-277V	0.10A@120V,0.06A@277V 0.14A@120V,0.07A@277V 0.16A@120V,0.08A@277V 0.20A@120V,0.10A@277V 0.22A@120V,0.11A@277V	1560 1950 2340 2860 3250	125- 130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9
010504	S-L38ZZD	NC-VP4F-M50W-CCT	4FT	(25W, 30W, 35W, 40W, 50W)	120-277V	0.22A@120V,0.11A@277V 0.26A@120V,0.12A@277V 0.30A@120V,0.14A@277V 0.34A@120V,0.15A@277V 0.43A@120V,0.19A@277V	3250 3750 4375 5000 6250	125- 130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9
010508	S-80V0MQ	NC-VP8F-M100W-CCT	8FT	(50W, 60W, 70W, 80W, 100W)	120-277V	0.43A@120V,0.20A@277V 0.51A@120V,0.23A@277V 0.59A@120V,0.27A@277V 0.68A@120V,0.30A@277V 0.84A@120V,0.38A@277V	6250 7500 8750 10000 12500	125- 130 lm/W	(3500K, 4000K, 5000K, 5700K, 6500K)	0-10V	>80	>0.9




StormGuard Series LED Vapor Tight Light


DIMENSIONS

Unit: mm/inch


2FT

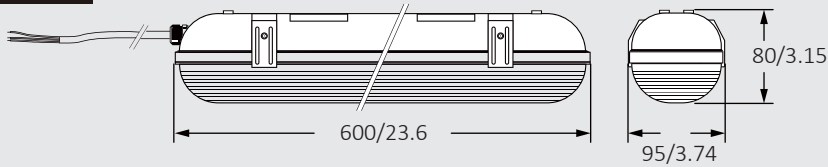

4FT

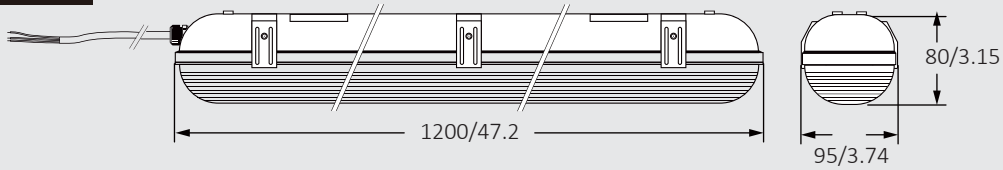

8FT

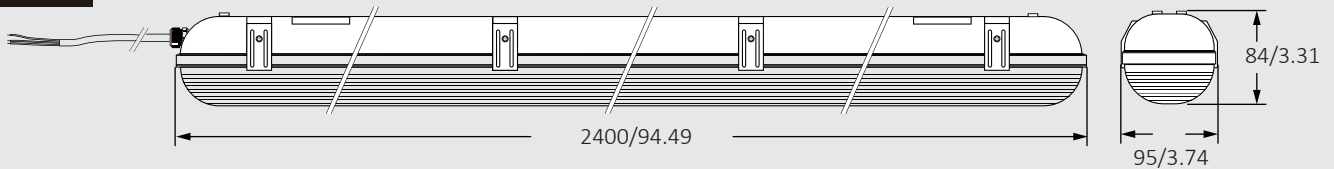


Dimensional tolerances: (+1.5mm, -1.0mm)


PHOTOMETRIC DATA

2FT

Polar Curve




Cone Chart




4FT

Polar Curve



Cone Chart



PACKING INFO

Catalog Number	Product Weight (kg)		Package Weight (kg)		Q'ty/BOX (PCS)	Q'ty/CTN (PCS)	Carton Size(mm)	40HQ (PCS)
	N.W/CTN	G.W/CTN	N.W/CTN	G.W/CTN				
NC-VP2F-M25W-CCT	1.07	1.28	6.42	8.44	1	6	650*320*200mm (25.59"*12.6"*7.87")	9072
NC-VP4F-M50W-CCT	1.86	2.2	11.16	14.26	1	6	1250*320*200 (49.21"*12.6"*7.87")	4536
NC-VP8F-M100W-CCT	4.17	4.72	16.68	21.44	1	4	2460*220*210mm (96.85"*8.66"*8.27")	1920